




SPECIFICATION



.....	3
General Description	3
.....	3
.....	3
.....	4
.....	5
.....	7
.....	8
.....	11
.....	11
.....	12
.....	13
.....	14
.....	15
.....	15
.....	17
.....	17

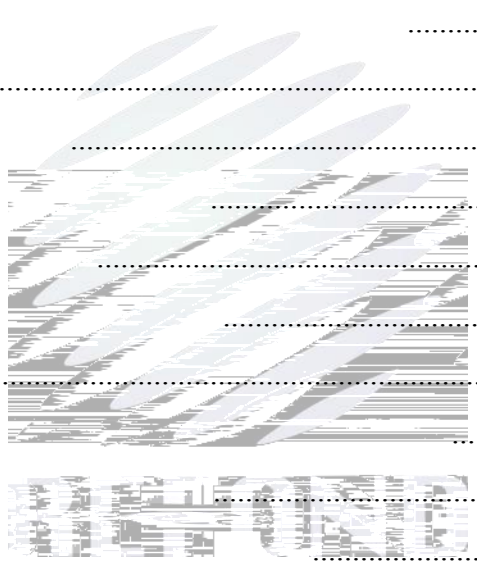


1. Description


1.1

1.2 Features


1.3 Application



1.4 Package Dimension

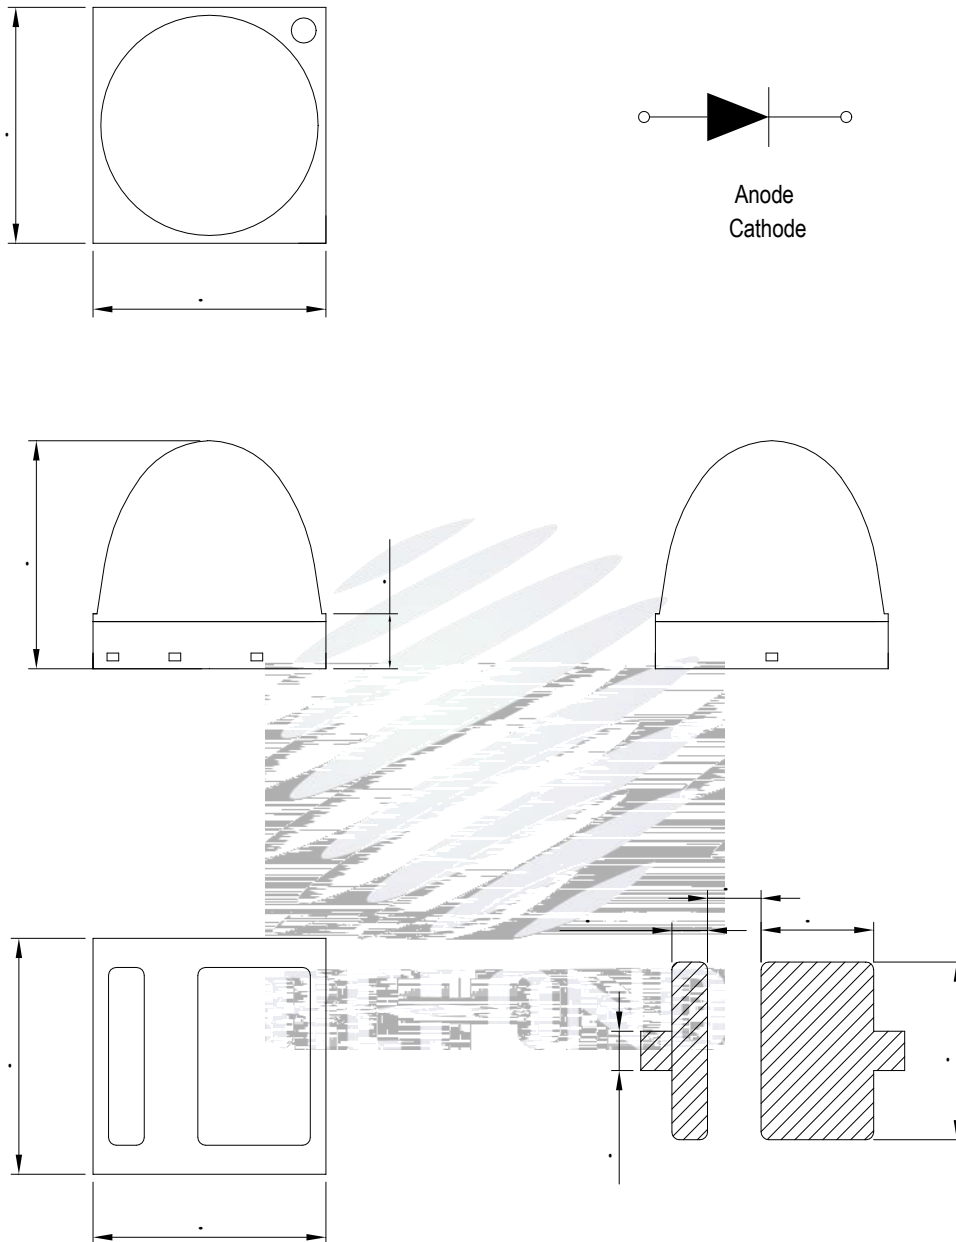


±





1.6 Bin Range Of Forward Voltage and Luminous Flux (IF=350mA)

BIN (IF=350mA)


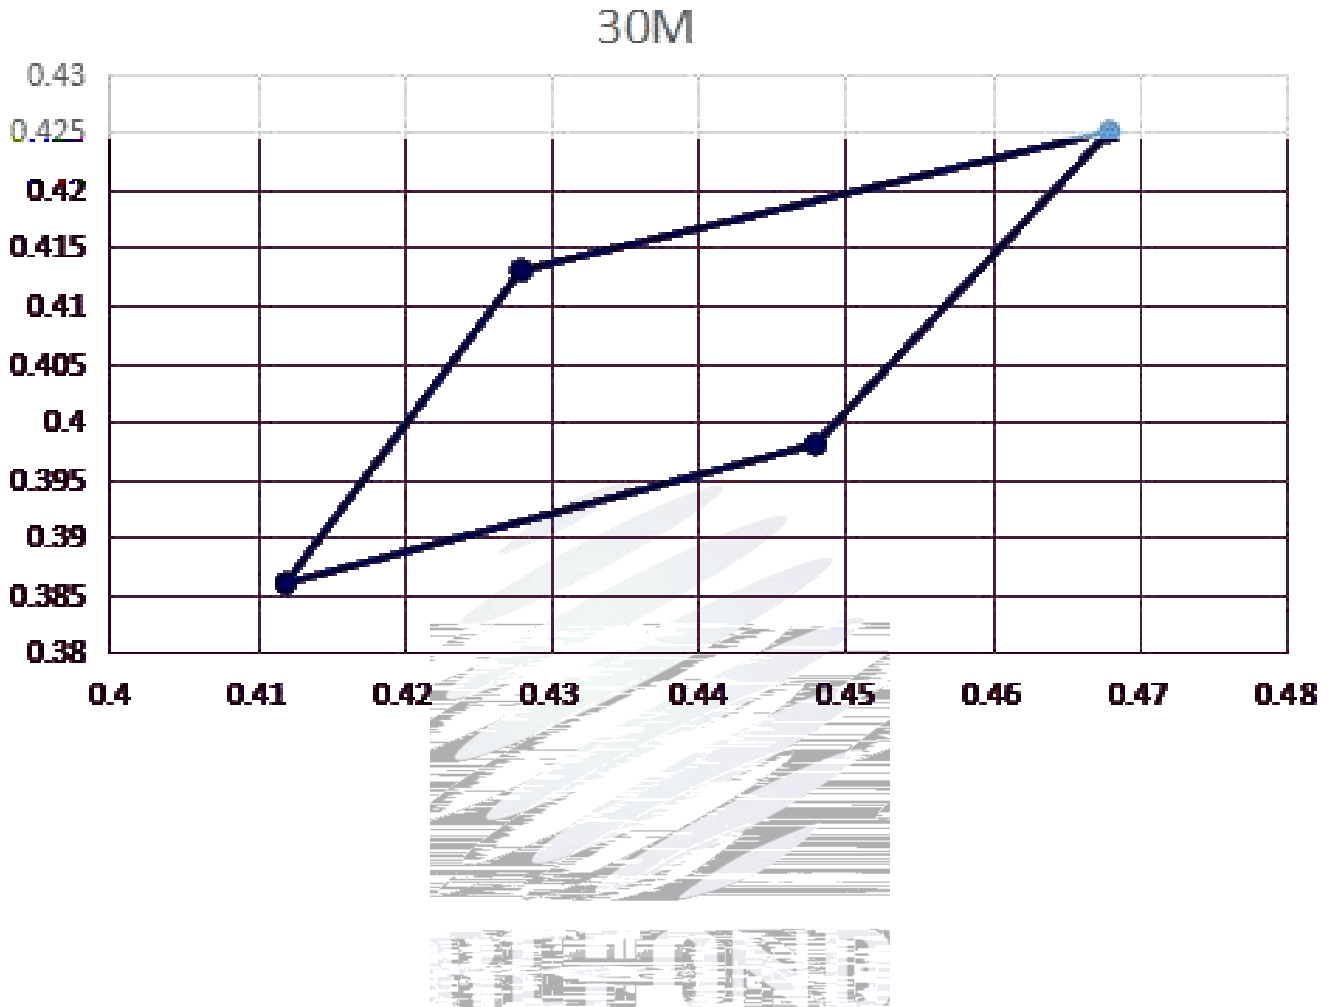


Bin data




Bin Code	X1	Y1	X2	Y2	X3	Y3	X4	Y4
30M	0.468	0.425	0.428	0.413	0.412	0.386	0.448	0.398




兴中子助
专用章 承认

1.7 Typical Optical Characteristics Curves

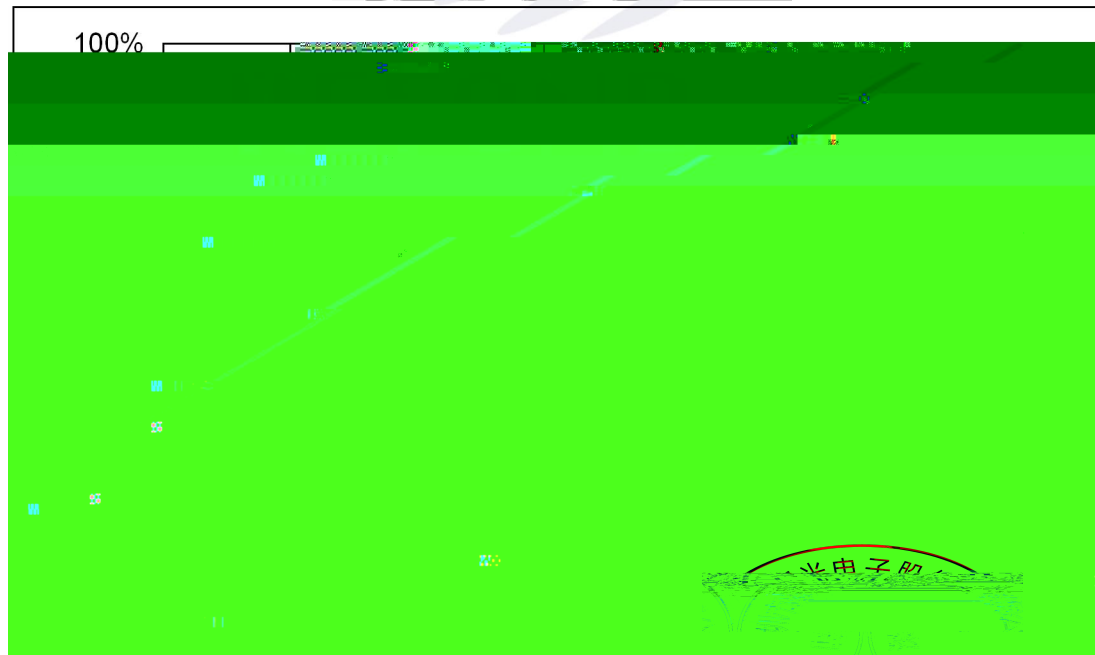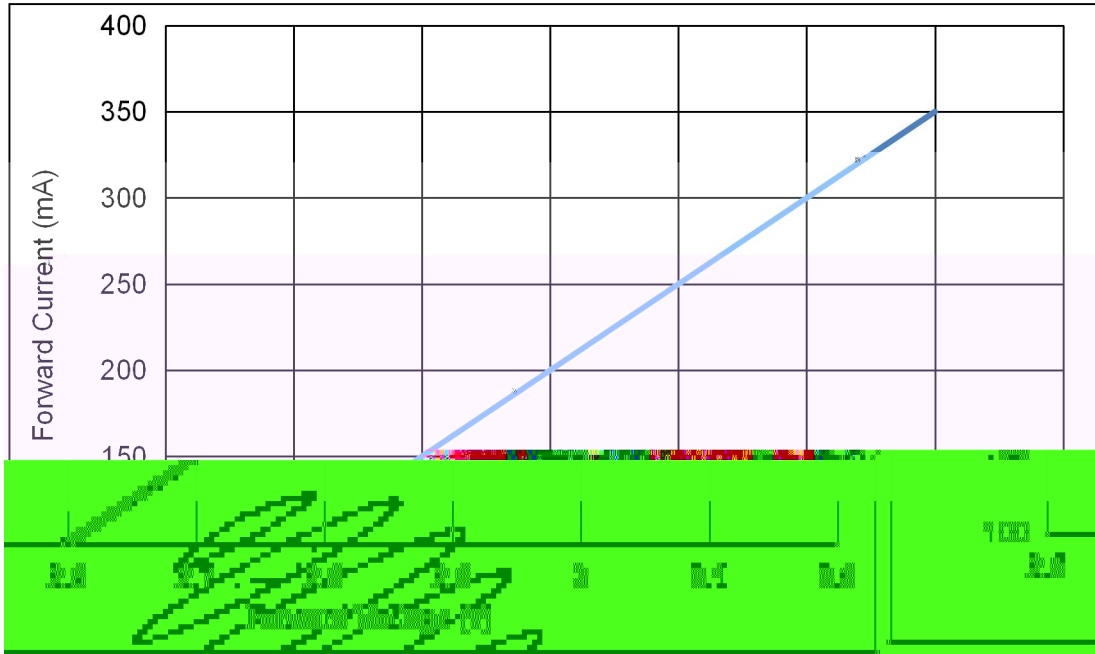

兴电子助
专用章 承认

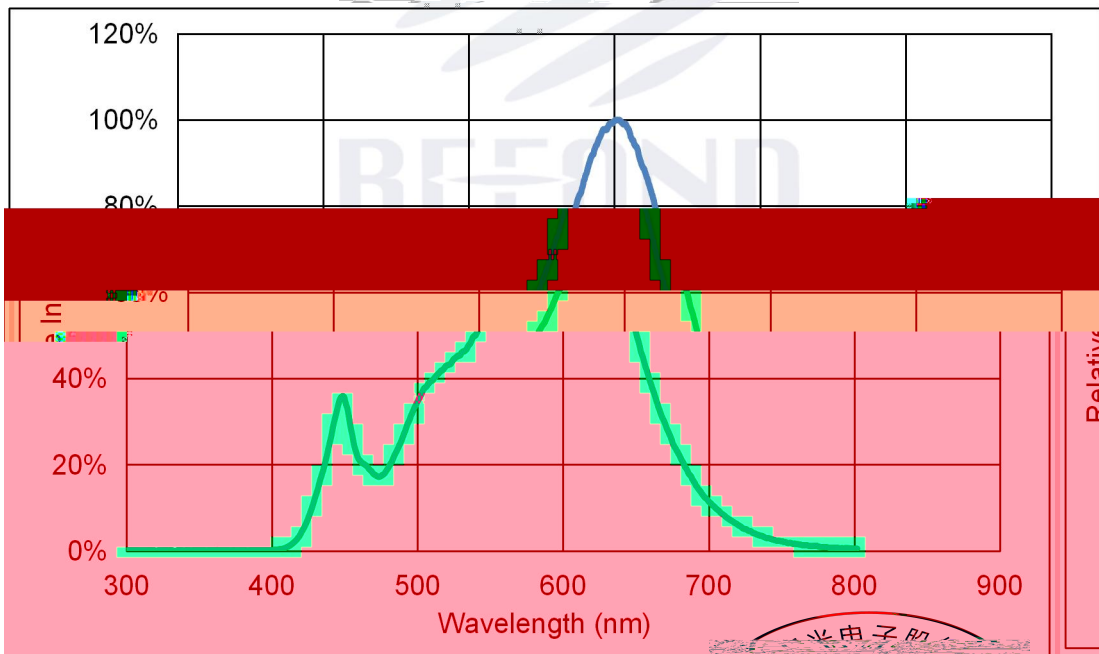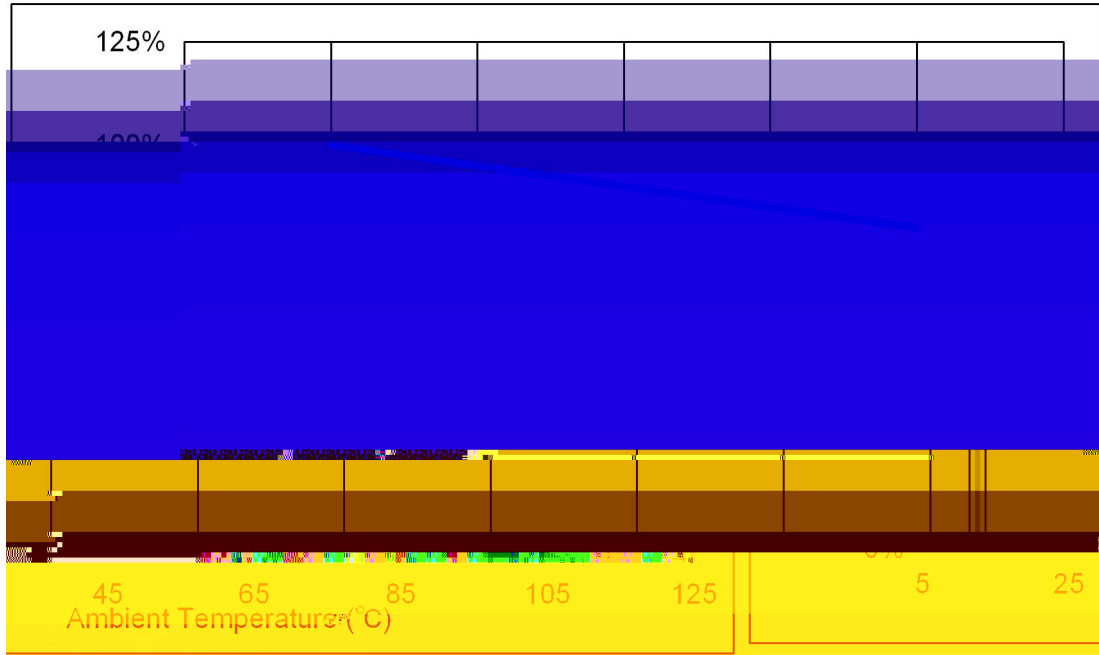

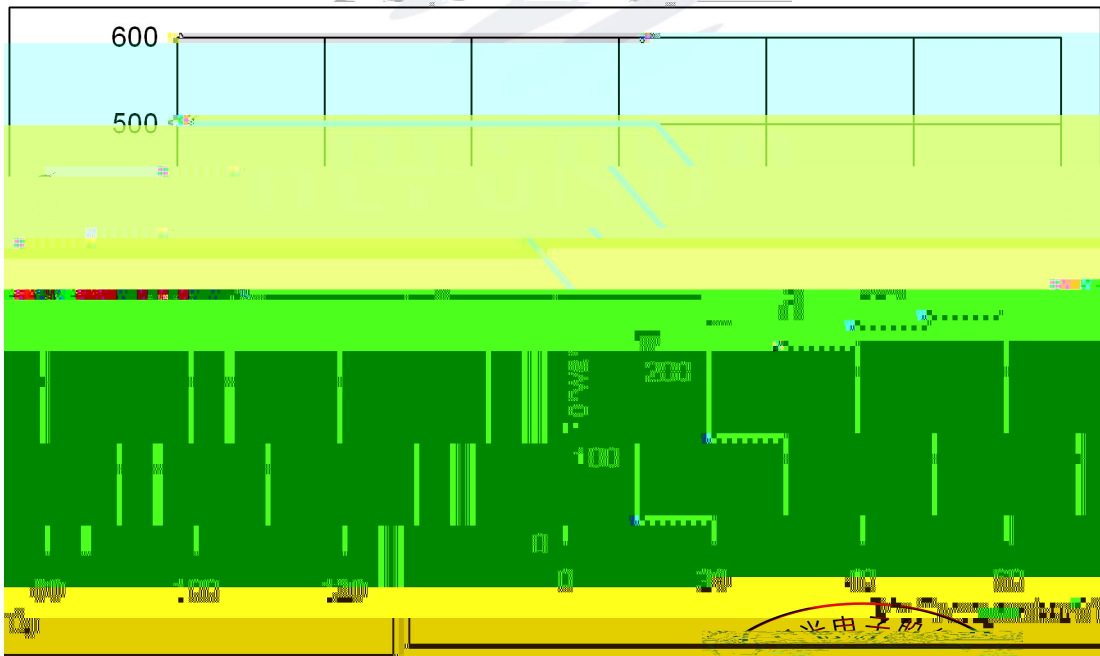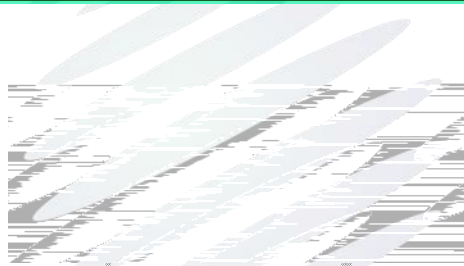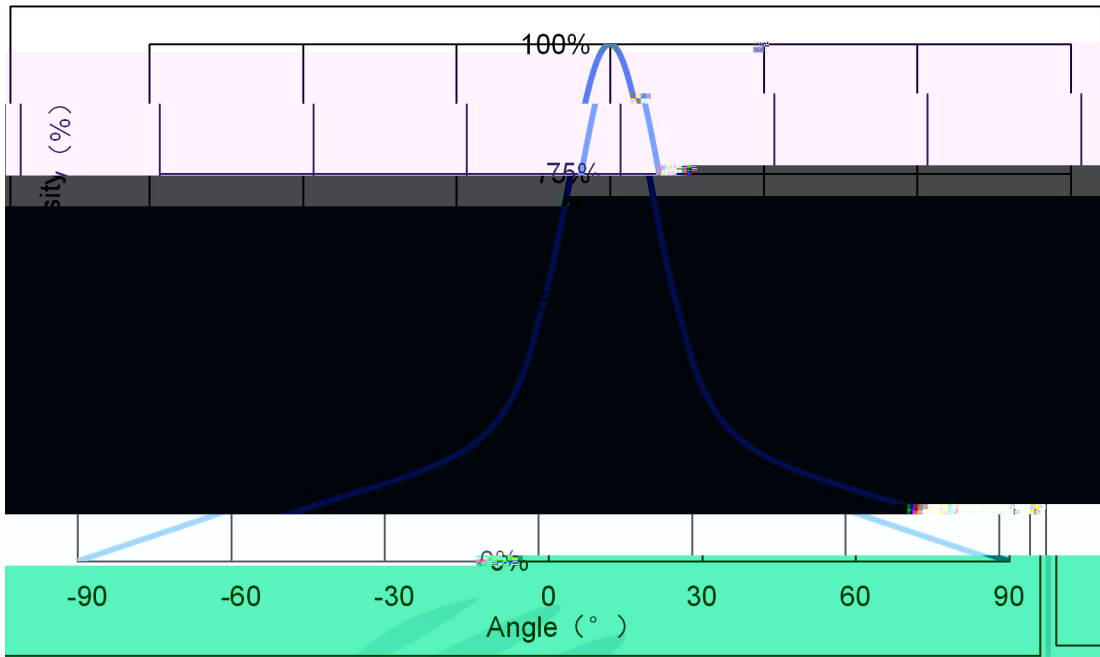



专用章


承认

2. Packaging


2.1 Packaging Specification

2500

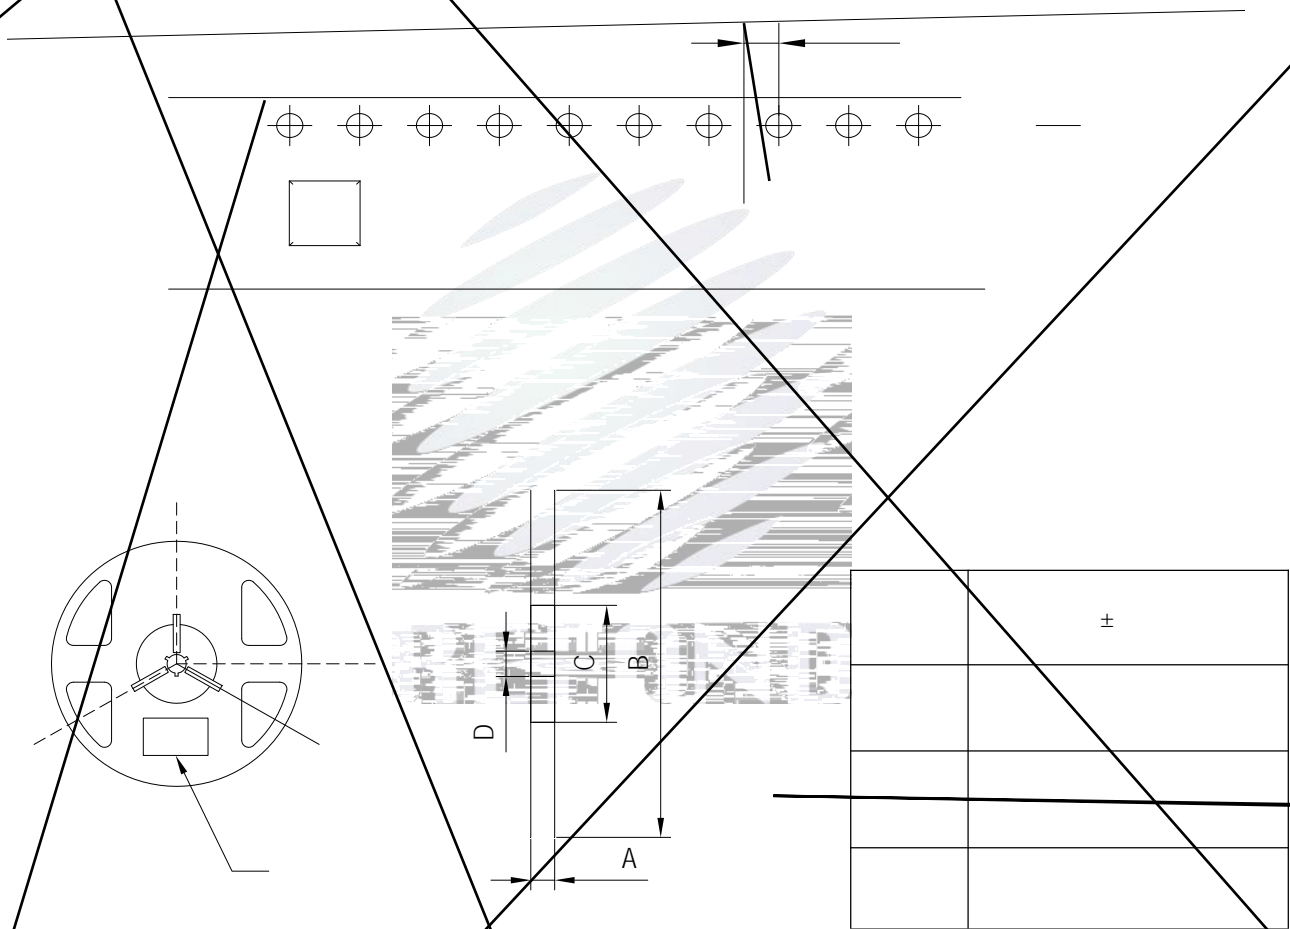


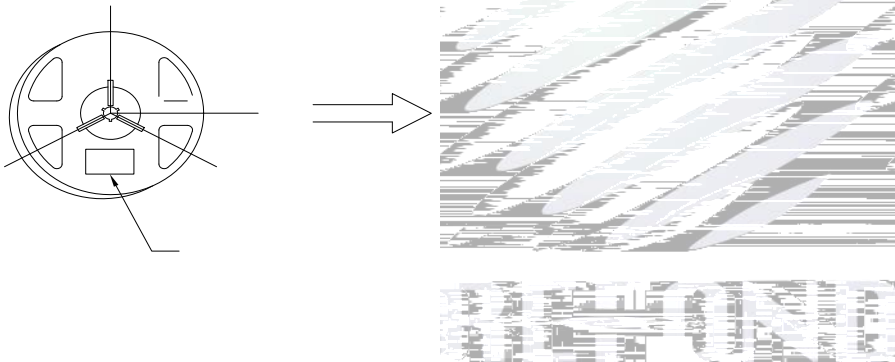

2.4 Reliability Test Items And Conditions



2.5 Criteria For Judging Damage



Luminous Flux				




°C

(2)



(1)



4. Handling Precautions

4.1 Handling Precautions

